

Plug n' Go STONE PLUS⁺

by

PurePro[®]

FEATURES

- Available in 35, 50 and 70 gallon sizes.
- Taco 007 pump with integral flow check, pre-wired.
- Plug n' Go STONE PLUS Thermostat w/Priority Control and temperature/differential adjustments.
- Plug n' Go STONE PLUS control intelligence eliminates temperature overshooting.
- 2" foam insulation ensures low standby heat loss.
- 8' of metal shielded conduit with wire nuts and connectors.
- Quick connect plug (removable) for direct connection to a PurePro[®] Trio Energy Manager.
- ¾" piping with sweat unions.
- Pre-installed T&P valves and quarter turn brass drain.
- Piping straight up from the tank for easy installation.
- High output capabilities to handle large demand.
- Removable cover for complete access to the circulator and piping.
- 10 year warranty upgradable to a lifetime.



Proudly
Manufactured in
the USA



Plug n' Go Indirect heaters combine fast installation with easy servicing. All piping and wiring connections are placed at an easy working height, while sweat connections make plumbing simple. The **Plug n' Go STONE PLUS** combines the proven reliability of a Stone-lined tank with the engineered simplicity of a Plug n' Go.

The **Plug n' Go STONE PLUS** is designed to be the easiest Indirect to install—period.

Everything you need to install comes pre-assembled on the tank. The seamless ½" thick Hydrastone lining has historically proven to be the most effective method of preventing tank failure due to corrosion. You can put a Hydrastone lined tank in almost any water condition without worry. Hard water, high chlorine water, well water—it's all the same with Hydrastone. The self-cleaning heat exchanger design maintains coil performance while reducing the need for cleaning.

It's simple, it's stone, and it saves money.

Plug n' Go STONE PLUS Thermostat

Some Indirect Water Heaters have a problem accurately controlling the output water temperature. The location of the sensor, the rate at which the tank heats and the overall accuracy of the thermostat contribute to all these potential issues.

The Plug n' Go STONE PLUS Thermostat eliminates this by using microprocessor intelligence to safely control the outlet water temperature to within 2 degrees of the set point. The temperature at which you set the thermostat is the temperature of the water coming out of the tank.

In addition, the Plug n' Go STONE PLUS Thermostat has a built-in Priority Control and temperature (110° to 160°) and differential adjustments (5° to 20°).



Plug n' Go STONE PLUS⁺

by **PurePro**

PERFORMANCE

BOILER OUTPUT BTU/HR INTO TANK	FIRST-HOUR RATING (90°F RISE) (GPH)	
	MODEL #	
	S35TPPGO	S50TPPGO
60000	112	124
70000	126	137
80000	140	150
90000	153	163
100000	167	177
110000	181	190
120000	195	203
130000	208	216
140000	212	229
150000	212	238

BOILER OUTPUT BTU/HR INTO TANK	FIRST-HOUR RATING (90°F RISE) (GPH)	
	MODEL # S70TPPGO	
	60000	145
70000	158	
80000	172	
90000	185	
100000	199	
110000	212	
120000	226	
130000	239	
140000	253	
150000	266	
160000	280	
170000	293	
180000	307	
183000	310	


SPECIFICATIONS

	MODEL #		
	S35TPPGO	S50TPPGO	S70TPPGO
Capacity (gallons)	35	50	70
Height (inches)	39	40	46.5
Diameter (inches)	22.75	26	28
Shipping Wt/Lbs.	185	238	290

Cold Water Inlet: 3/4" sweat union
 Hot Water Inlet: 3/4" sweat union
 Boiler Supply: 3/4" sweat union
 Boiler Return: 3/4" sweat union
 Warranty: 10-Year*

***10-year warranty is upgraded to Limited Lifetime by purchasing kit. See your F.W. Webb branch for details.**

THE HYDRASTONE PROCESS

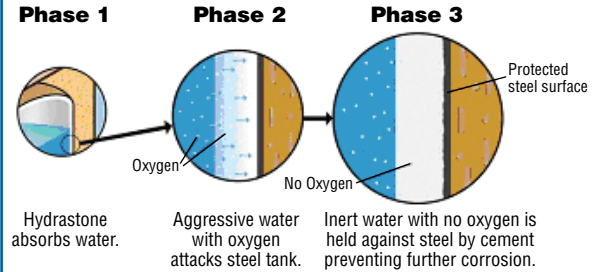

Everything you need for installation comes pre-assembled!

